

2-STEP UNFOLD GUIDE

65' x 200' EXAMPLE

(65' = To be unfolded; 200' = To be rolled out)


Note: VIAFLEX SealFresh® Gold™ Oxygen Barrier is the first Step of a 2-part cover system to be placed over the silage and then covered by a secondary silage cover. (Recommend DURA \bullet SKRIM® R6WB) *This is a typical cover size being unfolded and does not represent all SealFresh*® *Gold*™ *and DURA\bulletSKRIM*® *cover variations*.




Unroll entirely across the **Length** of the pile.



Unfold accordian-pleats across the **Width** of the pile.

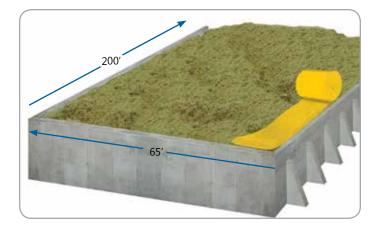

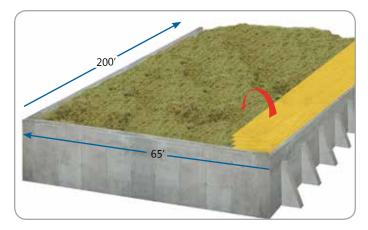





Unfold entirely across the **Width** of the pile.



Unroll entirely across the **Width** of the pile.

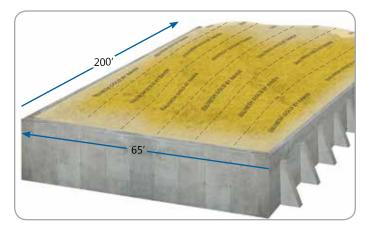

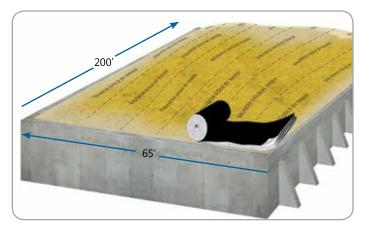

Note: To the best of our knowledge, these are typical installation procedures and are intended as guidelines only. VIAFLEX MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS OR GUIDELINES REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and we disclaim all liability for resulting loss or damage. Limited Warranty available at www.viaflex.com







2-STEP UNFOLD GUIDE

204' x 65' EXAMPLE

(204' = To be unfolded; 65' = To be rolled out)

Note: Please verify the white side of the DURA SKRIM® cover will face upward when unfolding to avoid rolling out backwards and having to reposition an open cover. DURA SKRIM® cover seams should run vertically over the pile to allow for rain run-off from the pile.


This is a typical cover size being unfolded and does not represent all DURA♦SKRIM® cover variations.




Unfold accordian-pleats across the **Length** of the pile.




Unfold entirely across the **Length** of the pile.

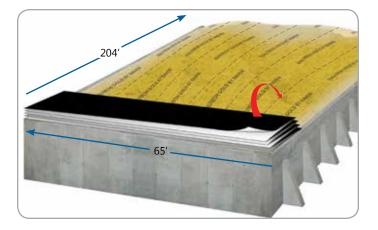

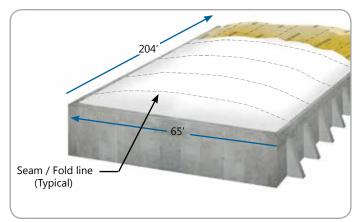

FINAL LAYOUT

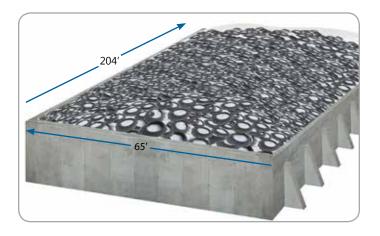

VIAFLEX Silage Covering Recommendations

Covering is extremely important to keep air and moisture from penetrating into the silage mass. Plastic should be weighted down with some form of dunnage to keep the plastic tightly secured and in direct contact with the silage mass.

Note: To the best of our knowledge, these are typical installation procedures and are intended as guidelines only. VIAFLEX MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS OR GUIDELINES REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and we disclaim all liability for resulting loss or damage. Limited Warranty available at www.viaflex.com

