


PRODUCT DESCRIPTION

DURA♦SKRIM® R5CC & R10CCU consist of two sheets of high-strength polyethylene film laminated together with a third layer of molten polyethylene. A heavy-duty scrim reinforcement placed between these layers greatly enhances tear resistance and increases service life. DURA♦SKRIM's heavy-duty diamond reinforcement responds to tears immediately by surrounding and stopping the tear.

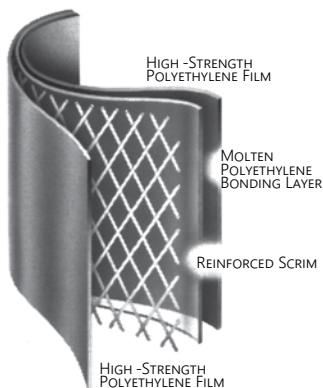

PRODUCT USE

DURA♦SKRIM® R5CC is used for temporary applications that require a lightweight yet highly tear-resistant film such as building enclosures and abatement applications.

DURA♦SKRIM® R10CCU is used in applications that require good outdoor life and demand high puncture and tear strengths. The two outer layers of DURA♦SKRIM® R10CCU contain high concentrations of UV inhibitors and thermal stabilizers to assure added outdoor life up to approximately one year.

SIZE & PACKAGING

DURA♦SKRIM® R5CC stock sizes are 6, 8, 10, 12, 16, 20, 24, 32, 40 and 60 feet wide by 100 feet long.

DURA♦SKRIM® R10CCU stock sizes are 6 and 20 feet wide by 100 feet long; and is also available in a variety of custom widths with minimum order quantities.

All panels are accordion folded and tightly rolled on a heavy-duty core for ease of handling and time saving installation.

DURA♦SKRIM®



Building Enclosure

PRODUCT

PART

DURA♦SKRIM R5CC

DURA♦SKRIM R10CCU

APPLICATIONS

Construction Enclosures	Asbestos Abatements
Temporary Liners or Covers	Fumigation Covers
Erosion Control	Temporary Walls
Shipping and Packaging	Remediation Covers
Temporary Erosion Control	

DURA♦SKRIM® R5CC & R10CCU

FOUR-LAYER REINFORCED EXTRUSION LAMINATE

PROPERTIES	TEST METHOD	DURA♦SKRIM R5CC		DURA♦SKRIM R10CCU	
		IMPERIAL	METRIC	IMPERIAL	METRIC
APPEARANCE		Colorless		Colorless	
THICKNESS, NOMINAL		6 mil	0.15 mm	10 mil	0.25 mm
WEIGHT		17 lbs/MSF 2.4 oz./yd ²	83 g/m ²	41 lbs/MSF 5.9 oz./yd ²	200 g/m ²
CONSTRUCTION		Extrusion laminated with scrim reinforcement			
² 1" TENSILE STRENGTH	ASTM D7003	53 lbf/in	93 N/cm	60 lbf/in	105 N/cm
² ELONGATION AT FILM BREAK	ASTM D7003	493 %	493 %	500 %	500 %
² GRAB TENSILE	ASTM D7004	60 lbf	267 N	80 lbf	356 N
¹ TRAPEZOID TEAR	ASTM D4533	32 lbf	142 N	55 lbf	245 N
MULLEN BURST	ASTM D751	34 psi	234 kPa	90 psi	621 kPa
WVTR	ASTM E96 Procedure B	0.587 grains/(100in ² -day)	0.591 g/(m ² -day)	0.214 grains/(100in ² -day)	0.215 g/(m ² -day)
PERM RATING	ASTM E96 Procedure B	0.086 Perms grains/(ft ² -hr-in Hg)	0.057 Perms g/(24hr-m ² -mm Hg)	0.031 Perms grains/(ft ² -hr-in Hg)	0.021 Perms g/(24hr-m ² -mm Hg)
MAXIMUM STATIC USE TEMPERATURE		180° F	82° C	180° F	82° C
MINIMUM STATIC USE TEMPERATURE		- 70° F	- 57° C	- 70° F	- 57° C

¹ Tests are an average of diagonal directions.

² Tests are an average of primary reinforcement directions.

DURA♦SKRIM®

DURA♦SKRIM® R5CC is a clear four-layer reinforced extrusion laminate. The outer layers consist of a clear high-strength polyethylene film. DURA♦SKRIM® R5CC is reinforced with a heavy duty scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 9" across the width. The individual plies are laminated together with molten polyethylene.

DURA♦SKRIM® R10CCU is a clear, four-layer reinforced extrusion laminate. The outer layers consist of a high strength polyethylene film with added U.V. and thermal stabilizers for extended outdoor longevity. DURA♦SKRIM® R10CCU is reinforced with a minimum of a 1000 denier scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 3" across the width. The individual plies are laminated together with molten polyethylene.



Scan QR Code to
download technical
data sheets.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. VIAFLEX MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage. Limited Warranty available at www.viaflex.com

VIAFLEX, INC.

821 W Algonquin Street Sioux Falls, SD 57104
Ph: +1 (605) 335-0174 • TF: +1 (800) 635-3456
© 2022 VIAFLEX, INC. All rights reserved.

sales@viaflex.com
www.viaflex.com

Viaflex

27-0021 04/25